


Series 8, Built-in oven with steam function, 60 x 60 cm, Black HSG7361B1

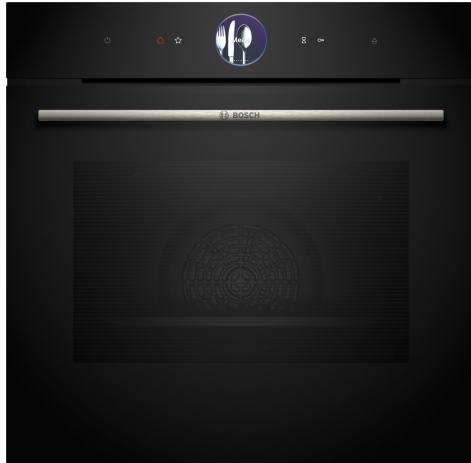

1 x enamel baking tray, 1 x grid, 1 x universal pan, size XL, punched,
1 x steam container, unpunched, size M, 1 x air fry & grill tray

HEZ629070 Air Fry & Grill tray

- **Digital Control Ring:** the simple and innovative way to select oven settings.
- **Added Steam Function:** your foods turn out crispy on the outside and juicy on the inside.
- **Multi Level Cooking**

Gross weight: 92.000 lbs
Built-in / Free-standing: Built-in
Door opening: Drop down
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
Dimensions: 595x594x548 mm
Dimensions of the packed product (HxWxD): 675x660x690 mm
Control Panel Material: Glass
Door Material: Glass
Net weight: 38.9 kg
Length electrical supply cord: 120 cm
Cooking method: Defrost, Regeneration, 4D hot air, Air fry, Full width grill, Hotair gentle, Half width grill, Conventional heat, Conventional heat gentle, Pizza setting, low temperature cooking, Bottom heat, Hot air grilling, pre-heating, warming
Time-setting Options: Start and Stop
Fuse protection: 16 A
Voltage: 220-240 V
Frequency: 50; 60 Hz
Plug type: Gardy plug w/ earthing
Energy input: Electric
Fuse protection: 16 A
Voltage: 220-240 V
Frequency: 50; 60 Hz
Plug type: Gardy plug w/ earthing
Dimensions of the packed product: 26.57 x 25.98 x 27.16
Net weight: 86.000 lbs
Included accessories: . 1 x enamel baking tray, 1 x grid, 1 x universal pan, 1 x steam container, punched, size XL, 1 x steam container, punched, size M, 1 x steam container, unpunched, size M, 1 x air fry & grill tray



4 242005 327188

Series 8, Built-in oven with steam function, 60 x 60 cm, Black HSG7361B1

Heating Functions

- Temperature range 30 °C - 250 °C
- Cavity volume: 71 l

Hook-in racks / rails

- Easy fit shelf support rails with electronic link

Design

- Cavity inner surface: enamel anthracite
- Extra large capacity oven

Colour display: Full Color

- Ecolyse features: back panel
- hydrolyse program

Comfort

- LED display control (red)
- electronic clock with LED display
- Oven door with Drop down door, soft closing, soft opening
- Supporting systems: Dish categories
- Rapid heating-up
- Rapid heating-up: automatic
- Tank empty indicator
- Location of the steam generator is outside of the cavity
- Integral cooling fan
- HomeConnect ready on WLAN

Accessories

- 1 x enamel baking tray, 1 x steam container, punched, size M, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size M, 1 x grid, 1 x universal pan, 1 x air fry & grill tray

Connecting cable: 120 cm

- Child lock
- Automatic safety switch off
- residual heat indicator
- Start-/Stop button
- door contact switch

Technical Information

- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
- Number of cavities: 1
- Heat source: electrical
- Cavity volume: 71 l
- Energy efficiency rating (acc. EU Nr. 65/2014): A+(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh

- Number of cavities: 1
- Heat source: electrical
- Cavity volume: 71 l

Dimensions:

- Appliance dimension (hxwxh): 595 mm x 594 mm x 548 mm
- Required niche size for installation (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

Imported and Marketed by


- BSH Household Appliances Manufacturing Pvt.Ltd. 2nd Floor, Arena House, Main Building, Plot No. 103, Road No. 12, MIDC, Andheri East, Mumbai 400093, Maharashtra, India.

Country of Origin



- Germany

Series 8, Built-in oven with steam function, 60 x 60 cm, Black HSG7361B1

Installing two appliances on top of each other
other
Air exchange

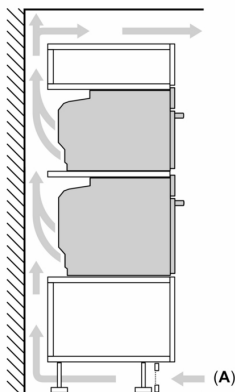

A: Air inlet $\geq 200 \text{ cm}^2$

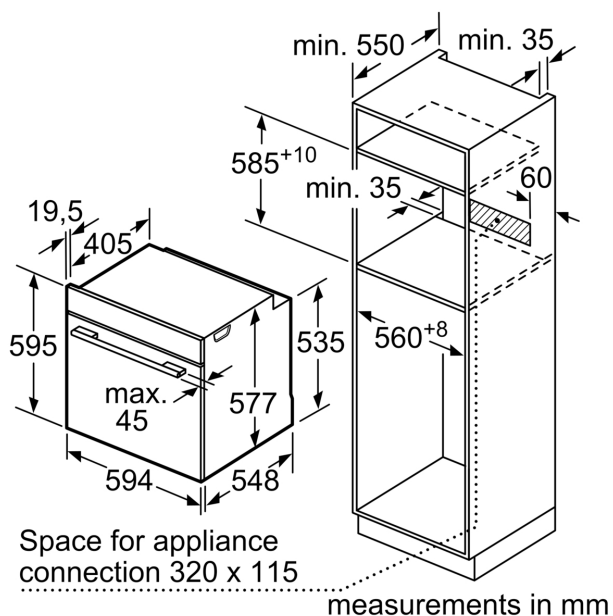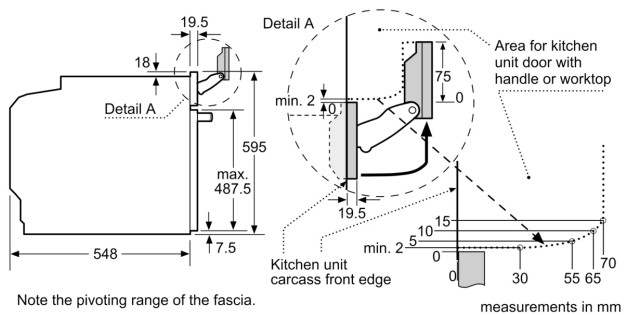

Measurements in mm
Worktop thickness when installing underneath a hob
(incl. substructure, if required)

Hob type	raised	flush
Induction hob	≥ 37	≥ 38
Full surface induction hob	≥ 47	≥ 48
Gas hob	≥ 30	≥ 38
Electric hob	≥ 27	≥ 30

