

iQ700, Siemens Built-in Oven, 60 x 60 cm, Black
HB978GNB1B



2 x combination grid, 1 x universal pan	
HZ327000	Baking stone
HZ631070	Baking tray, enamelled
HZ915003	Glass roasting dish, 5,4 L

- ✓ cookControl Pro – Excellent results, whatever the recipe or circumstances.
- ✓ Oven Assistant with Voice Control – Intuitively set the right programme.
- ✓ humidClean Plus - For fast cleaning dirt is softened beforehand by vaporizing soapy water. It can then be removed more easily.
- ✓ Home Connect with Remote Control and Monitoring – Unlock the full potential of your smart oven.
- ✓ bakingSensor Plus and roastingSensor Plus – Perfect baking and roasting results.

Gross weight: 40.7 kg
Built-in / Free-standing: Built-in
Integrated Cleaning system: Pyrolytic+Hydrolytic
Required niche size for installation (HxWxD): ..585-595 x 560-568 x 550 mm
Dimensions: 595x594x548 mm
Dimensions of the packed product (HxWxD):670x670x680 mm
Control Panel Material:Glass
Door Material:Glass
Net weight: 38.2 kg
Usable volume of cavity: 71 l
Heating Types: 4D hot air, Air fry, Full width grill, Hotair gentle, Half width grill, Conventional heat, Conventional heat gentle, Pizza setting, low temperature cooking, Deep-frozen food special, Bottom heat, Hot air grilling, pre-heating, warming
Length electrical supply cord: 120 cm
Pull-out system: Level-independent clip rails - for safe insertion and removal of accessories on any level
Included accessories: 2 x combination grid, 1 x universal pan
Broil Element Wattages cavity 1:2800 W
Convection Element Wattages cavity 1: 2200 W
Energy efficiency rating:A+: efficient
Energy consumption per cycle conventional (2010/30/EC):0.87 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC): 0.69 kWh/cycle
Energy efficiency index (2010/30/EC): 81.2 %
Connection Rating: 3600 W
Fuse protection:16 A
Voltage:220-240 V
Frequency:50; 60 Hz
Plug type: No plug
Energy input: Electric
Required cutout/niche size for installation (in): x
Dimensions of the packed product: 26.37 x 26.37 x 26.77
Net weight: 84.000 lbs
Gross weight: 90.000 lbs



iQ700, Siemens Built-in Oven, 60 x 60 cm, Black HB978GNB1B

Heating Functions

- Temperature range 30 °C - 300 °C
- Cavity volume: 71 l

Hook-in racks / rails

- full extension, pyrolytic proof, 1 Clip-on rail, Detend function

Design

- Black Steel Design
- Cavity inner surface: enamel anthracite

Colour display: Full Color

- Pyrolytic self-cleaning function
- hydrolyse program

Comfort

- LED display control (red)
- electronic clock with LED display
- Oven door with Drop down door, soft closing, soft opening
- Supporting systems: Dish categories
- Rapid heating-up
- coolStart
- Rapid heating-up: automatic
- Integral cooling fan
- HomeConnect ready on WLAN

Accessories

- 2 x combination grid, 1 x universal pan

Connecting cable: 120 cm

- Electronic door lock
- Child lock
- Automatic safety switch off
- residual heat indicator
- Start-/Stop button
- door contact switch

Technical Information

- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
- Number of cavities: 1
- Heat source: electrical
- Cavity volume: 71 l
- Energy efficiency rating (acc. EU Nr. 65/2014): A+(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69

kWh


- Number of cavities: 1
- Heat source: electrical
- Cavity volume: 71 l

Dimensions:


- Appliance dimension (hxwxh): 595 mm x 594 mm x 548 mm
- Required niche size for installation (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

iQ700, Siemens Built-in Oven, 60
x 60 cm, Black
HB978GNB1B


Installing two appliances on top of each other
Air exchange

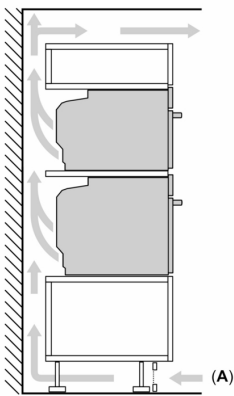

A: Air inlet $\geq 200\text{ cm}^2$

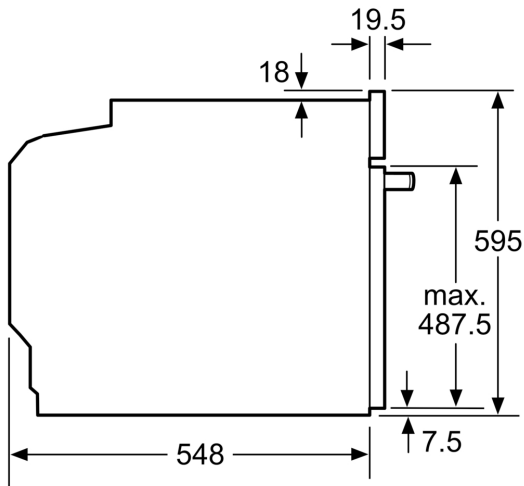

measurements in mm

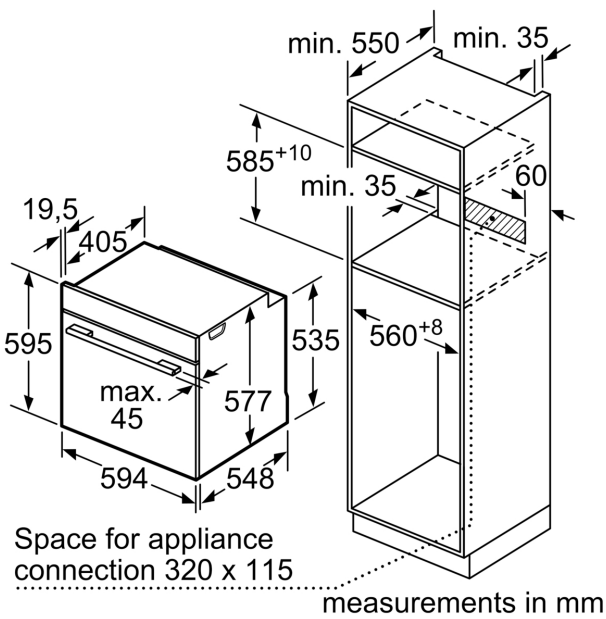

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

