

Version	Ceiling - 120 cm - Glass
Design	Saggia - Sommella
Collection	Design

TECHNICAL FEATURES

Materials/Finishes	Glass
Materials/Finishes	Painted white steel
Features	Perimeter suction Perimeter LED Lighting Possibility of painting the panel
Control	Electronic control Remote control included Dialogue system
Function	Extracting/Filtering
Lighting	LED (4000 K)
Filters	Metallic grease filter, removable and washable Combined regenerable Carbon.Zeo filter (optional)
Motor	Motor sold separately
Dimensions	120 cm
Maximum Electric hob distance	150 cm
Maximum Gas hob distance	150 cm
Notes	



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption	90 W
Voltage/Frequency	220-240V ~ 50-60Hz

MOTOR

Motor	Motor sold separately 800 m³/h Slim motor 800 m³/h
Maximum capacity	550 m³/h I.E.C.61591
Maximum sound level	63 dB (A)re1pW I.E.C. 60704-2-13
Energy class	C

WEIGHTS AND VOLUMES

Gross weight	52.2 kg
Net weight	45.2 kg
Volume	0.37 m³
Packaging dimensions	L 1395 x H 310 x P 865 mm

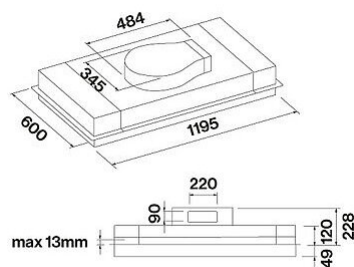

Hood and motor dimensions


Optional accessories

Code	Description
KACL.789	Ceiling hood connection for rectangular pipes
KACL.396	Flange - Ø200
KACL.931	Filter spare part Carbon.Zeo (for vertical outlet and under base kit h100 mm)
KACL.782#49F	Slim motor 800 m3/h
KACL.798#41F	Remote under-roof motor 950 m3/h
KACL.786#41F	Outdoor extractor fan 1000 m3/h
KACL.796#4AF	Outdoor extractor fan 1500 m3/h
KACL.797#4AF	Remote under-roof motor 1300 m3/h
KACL.928	Filter spare part Carbon.Zeo (for horizontal outlet)
KACL.939#BF	Carbon.Zeo filter unit kit for ceiling (horizontal outlet)
KACL.953#BF	Carbon.Zeo filter unit kit for ceiling (vertical outlet)
KACL.398	Flange - Ø150

ENGINE SPECIFICATIONS

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	52	58	63	66
Capacity	285	340	470	550
Maximum pressure (Pa)	400	480	500	600
Motor power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

FLOW RATE / PRESSURE

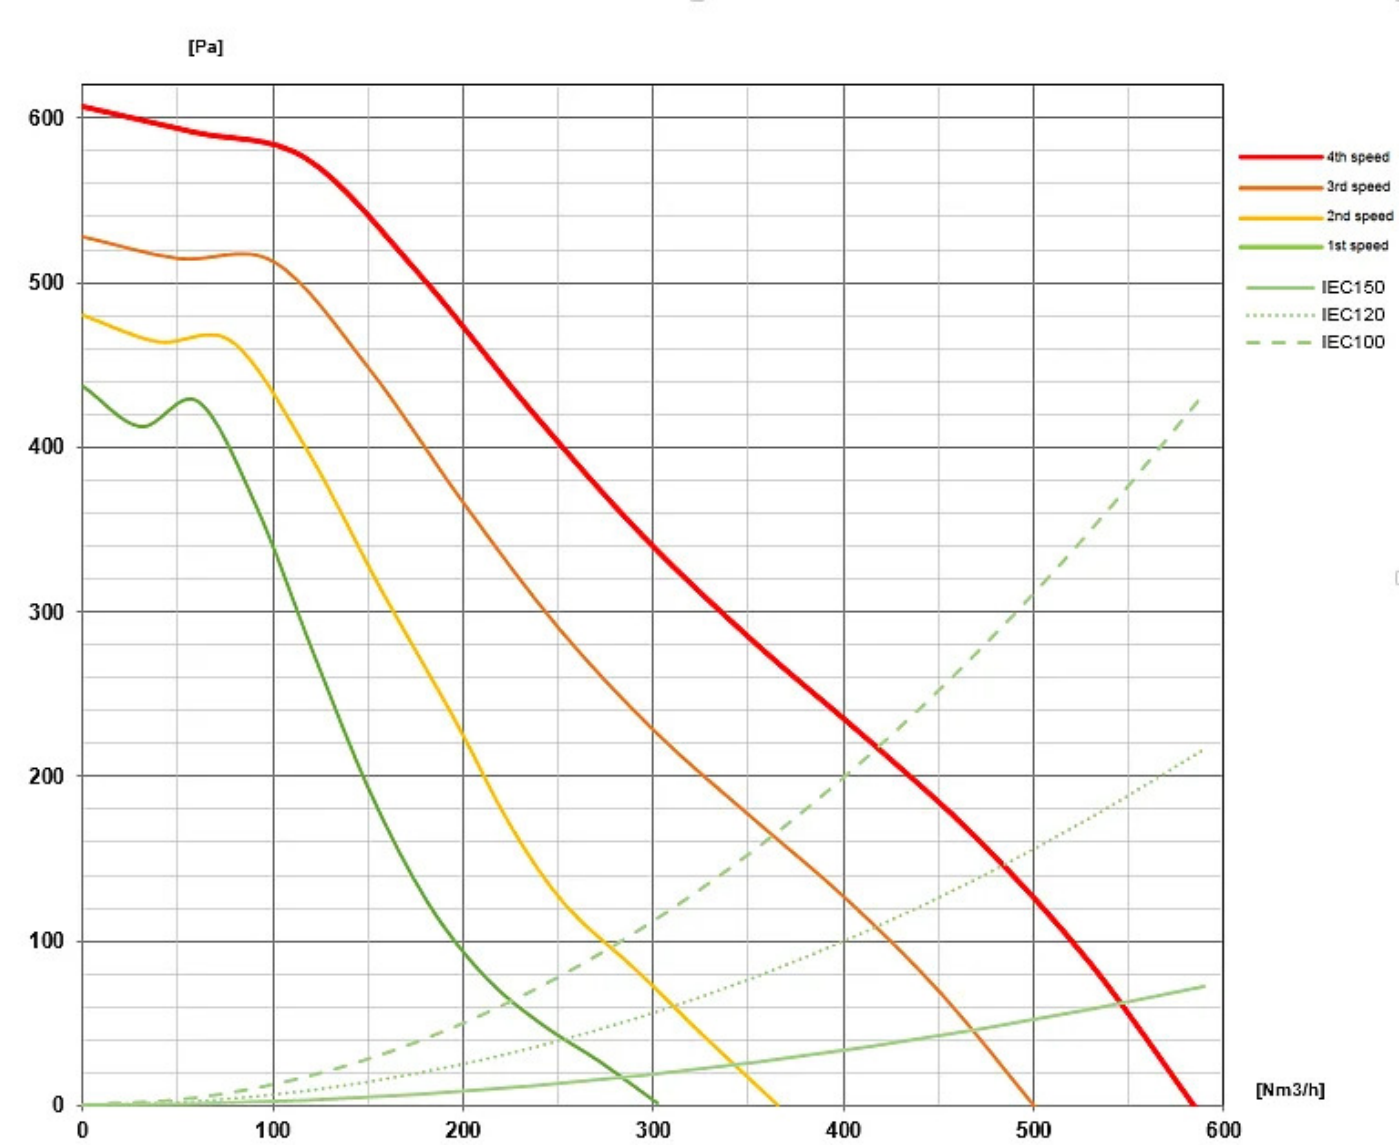


SLIM MOTOR 800 M3/H

CARATTERISTICHE TECNICHE MOTORE

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	52	58	63	66
Capacity	285	340	470	550
Maximum pressure (Pa)	400	480	500	600
Motor power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

FLOW RATE / PRESSURE

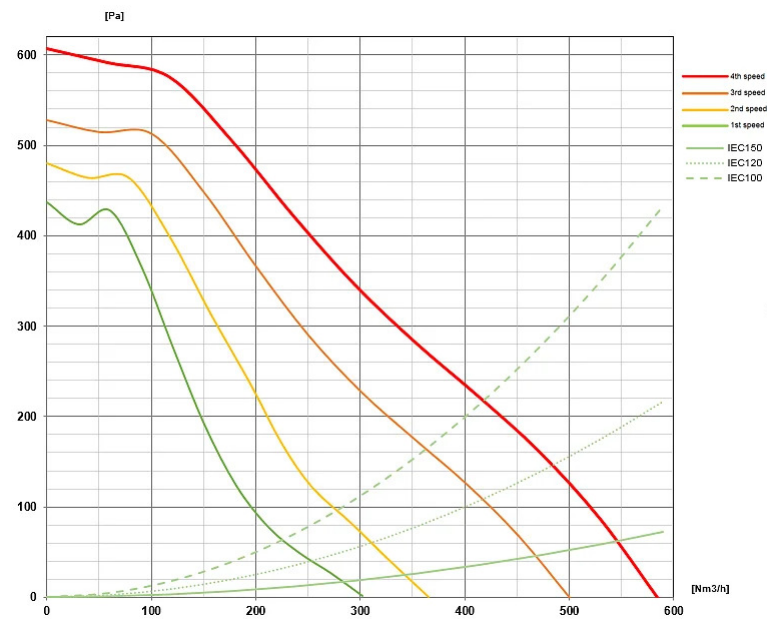

PF		
S	Saggia - Sommella	
M	Ceiling - 120 cm - Glass	
AEC	97.30	kWh/a
EEC	C	
FDE	24.30	
FDEC	B	
LE	4.00	
LEC	G	
GFE	65.1	
GFEC	D	
Qmin	285	m ³ /h
Qmax	470	m ³ /h
Qboost	550	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO		
PS	0.48	W
PI		
F	1.10	
EEL	83.10	
Qbep	337	m ³ /h
Pbep	298	Pa
Qboost	550	m ³ /h
Wbep	115	W
WL	70.00	W
Emiddle	277	lux
Lwa-SPEmax		dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.