

Ceiling 140 cm - LED - Inox

Falmec Lab



Komplektā iekļauta tālvadības pults
Dialogue system

Dynamic LED Light
Strip LED - 2700 K / 5600 K

140 cm

150 cm

150 cm

50 W

220-240V ~ 50-60Hz

Shuko

950 m³/h

Remote under-roof motor 950 m³/h

695 m³/h I.E.C.61591

62 dB (A)re1pW I.E.C. 60704-2-13


C

45.4 kg

40.1 kg

0.22 m³


L 1455 x H 210 x P 730 mm



Nuvola Led 140 - under roof motor

KACL.789	Junction for ceiling hoods
KACL.396	
KACL.931	Filter replacement Carbon.Zeo for vertical outlet and under base kit h100 mm
KACL.782#49F	Slim motor 800 m3/h
KACL.798#41F	Remote under-roof motor 950 m3/h
KACL.786#41F	Outdoor extractor fan 1000 m3/h
KACL.796#4AF	Outdoor extractor fan 1500 m3/h
KACL.797#4AF	Remote under-roof motor 1300 m3/h
KACL.928	Replacement Carbon.Zeo filter for horizontal outlet
KACL.939#BF	Ceiling re-circulation filtering kit (only for Slim Motor)
KACL.953#BF	Carbon.Zeo vertical outlet ceiling filter unit kit
KACL.398	Ø150 - Flange
KACL.1050	
KACL.1064#BF	


	1	2	3	4
	48	56	62	66
	365	480	600	695
	510	520	560	590
	190	220	250	270
	150	150	150	150

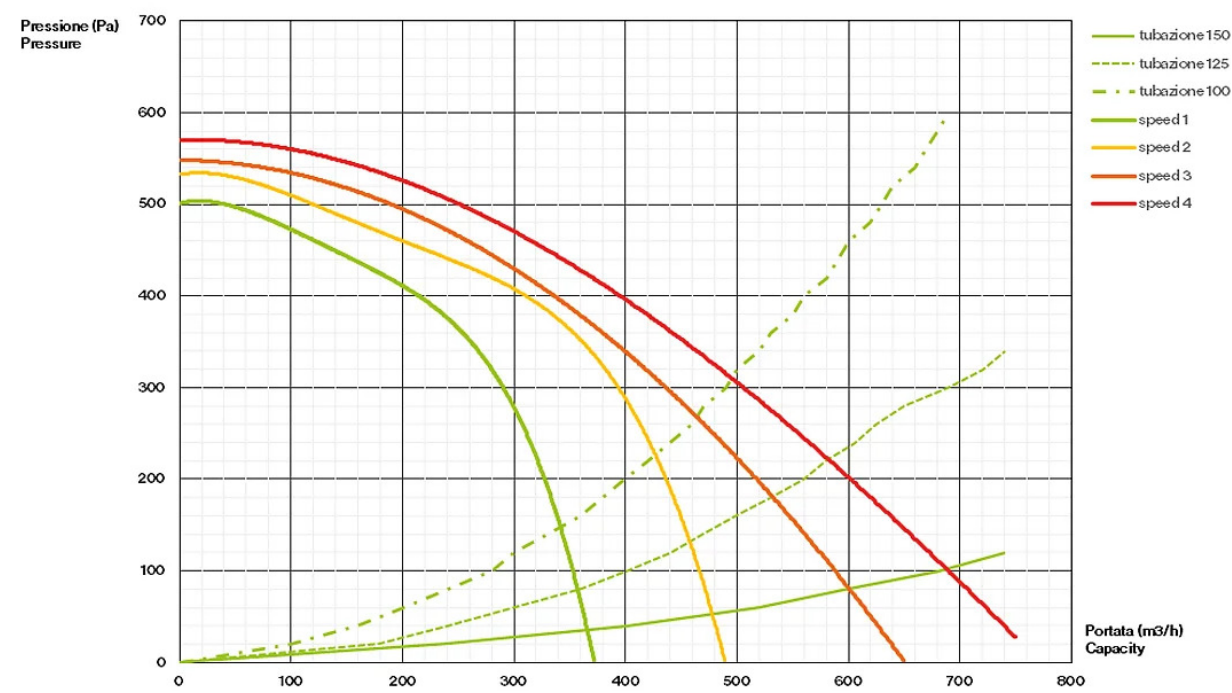

REMOTE UNDER-ROOF MOTOR 950 M3/H

CARATTERISTICHE TECNICHE MOTORE

	1	2	3	4
	51	59	64	68
	330	480	610	730
	460	520	560	580
	187	210	225	240
	150	150	150	150

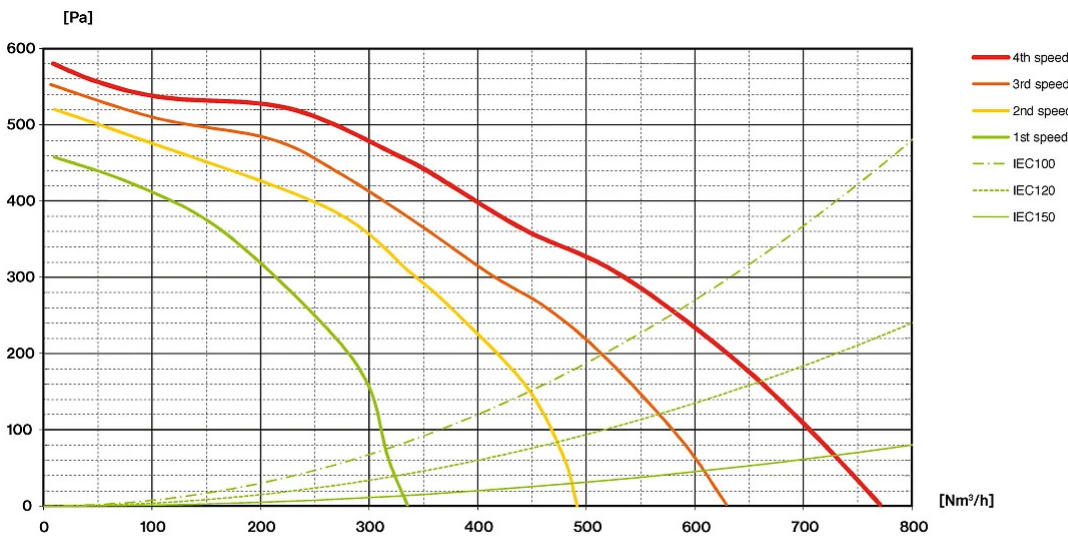

REMOTE UNDER-ROOF MOTOR 950 M3/H

PF		
S	Falmec Lab	
M	Remote under-roof motor 950 m3/h	
AEC	93.80	kWh/a
EEC	C	
FDE	28.10	
FDEC	A	
LE	14.10	
LEC	D	
GFE	65.1	
GFEC	D	
Qmin	365	m ³ /h
Qmax	600	m ³ /h
Qboost	695	m ³ /h
SPEmin	48	dBa
SPEmax	62	dBa
SPEboost	66	dBa
PO		
PS	0.48	W
PI		
F	1.00	
EEL	72.60	
Qbep	384	m ³ /h
Pbep	414	Pa
Qboost	695	m ³ /h
Wbep	157	W
WL	50.00	W
Emiddle	705	lux
Lwa-SPEmax		dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.