

iQ700, ceiling cooker hood, 105 cm, Black
LR18HLT65



LZ20JXP00	Long Life odor filter (replacement)
LZ21JXB16	Clean Air Plus odor filter (replacement)

The varioLift design hood ensures the individual height adjustment for top performance while cooking, a clear view when not in use and is always at your service via voice control.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ Detects steam and odours to adjust the power level automatically – climateControl sensor with cookConnect system
- ✓ varioLift – Clean air while you’re cooking and a clear view afterwards.
- ✓ voiceControl : Control hood functions using your voice.
- ✓ Home Connect – The app that makes your hood work smarter.

Typology: Island/Ceiling
Length electrical supply cord: 0.0 cm
Net weight: 61.7 kg
Type of control: Electronic
Number of speed settings: 3-stage + 2 intensive
Boost position output recirculating: 713 m³/h
Maximum output recirculating air: 411 m³/h
Number of lights: 6
Grease filter material: Other
Odour filter: Yes
Air circulation: Recirculating air only
Optional accessories: LZ20JXP00, LZ21JXB16
Grease filter type: Multilayer cassette
Clean filter reminders: Yes
Connection Rating: 250 W
Voltage: 220-240 V
Frequency: 50; 60 Hz
Plug type: No plug
Type: Island
Plug type: No plug
Dimensions of the product, with chimney (if exists) (in): x x
Dimensions of the packed product: 31.49 x 52.75 x 27.95
Net weight: 136.000 lbs
Gross weight: 176.000 lbs
Motor location: Integrated motor in hood body
No-return airflow flap: No
Length electrical supply cord: 0.0 cm
Dimensions of the product, with chimney (if exists): x 1050.0 x 600.0 mm
Dimensions of the packed product (HxWxD): . 800 x 1340 x 710 mm
Net weight: 61.7 kg
Gross weight: 79.7 kg



iQ700, ceiling cooker hood, 105 cm, Black LR18HLT65

Variant

- Ceiling hood
- For ceiling mounted installation

Design

- Rim ventilation
- Rim extraction

Technical information

- Recirculating operation only
- Efficient BLDC-technology
- Max. extraction rate: 729 m3/h

Comfort

- Cooktop-based hood control
- (with matching cooktop)
- forced delay shutoff, Air quality sensor

Technical Information

- Steel filter cover, dishwasher safe
- Saturation display filter: grease- and charcoal filter
- 6 x 3W LED
- Light dimmer function
- Softlight with dimmer function
- Light Intensity: 1156 lux
- 3 speeds plus 2 intensive
- Automatic intensive revert
- Automatic 10 minutes after running
- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- interval function: available via Home Connect
- silence function: available via Home Connect


Connection and Consumption

- Total Connected load: 250 W


Dimensions:

iQ700, ceiling cooker hood, 105 cm, Black
LR18HLT65

measurements in mm

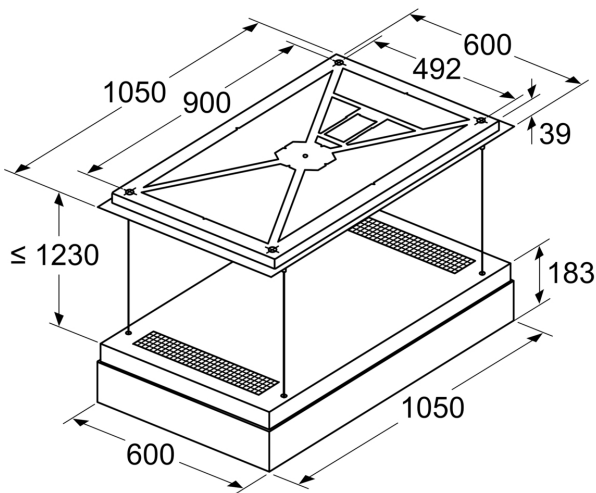


measurements in mm
Recommended for ceiling heights
up to 3500 mm

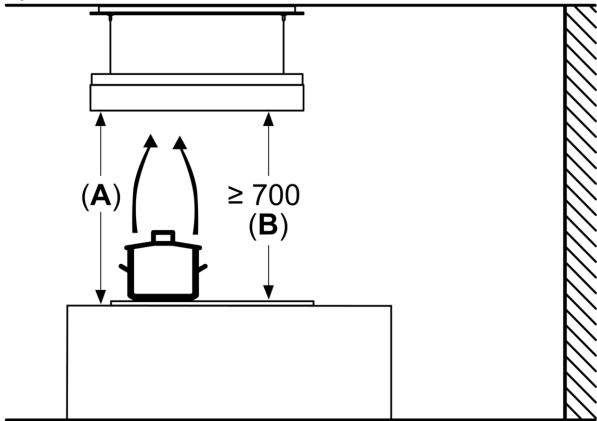

A: Optimum performance 700-1500
B: From upper edge of pan support

measurements in mm
Ceiling storage recess



A: Concrete ceiling
B: ≥ 25 mm all around
C: Depending on the cooking method,
residual moisture may escape from
the appliance even after use.
We therefore recommend treating
the ceiling storage recess with a paint
that prevents mould formation.