


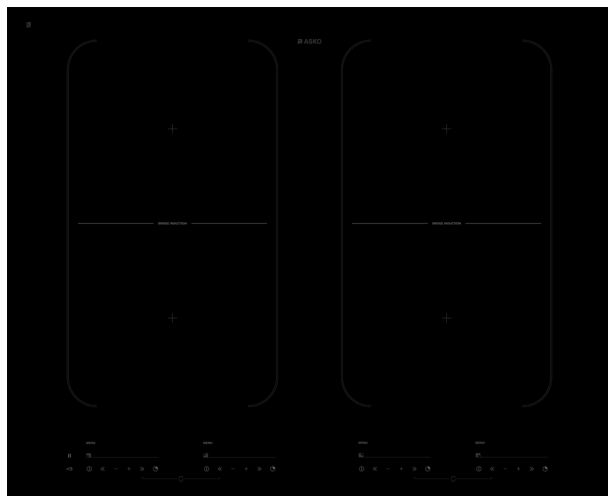

Induction hob

HI1655G

Real Bridge™ - Connect two zones into one large zone, completely without cold spots

Installation: Built-in

Black

Construction and performance

- Number of cooking zones: 4
- PowerBoost function: Yes
- Front left zone type: Square zone Real Bridge™
- Front left zone dimension: 190X220
- Front left zone power: 2300 W
- Front left zone boost power: 3700 W
- Front right zone type: Square zone Real Bridge™
- Front right zone dimension: 190X220
- Front right zone power: 2300 W
- Front right zone boost power: 3700 W
- Rear left zone type: Square zone Real Bridge™
- Rear left zone dimension: 190X220
- Rear left zone power: 2300 W
- Rear left zone boost power: 3700 W
- Rear right zone type: Square zone Real Bridge™
- Rear right zone dimension: 190X220
- Rear right zone power: 2300 W
- Rear right zone boost power: 3700 W

Use and flexibility

- Bridge function: Real Bridge™ - Connect two zones into one large zone, completely without cold spots
- Pause function: No

Interaction and control

- Control panel: SmartControl

Design and integration

- Edges: Stainless Steel side profiles
- Min. niche width: 560 mm
- Min. niche height: 48 mm
- Depth (incl. wall spacing): 490 mm

Safety and maintenance

- Residual heat indicator: Yes

Technical data

- Voltage (V): 220-240 V
- Frequency: 50 Hz, 60 Hz
- Time needed for the appliance to reach the applicable low power mode or condition: 20 min
- Power consumption in standby mode of hob: 0.5 W

Dimensions

- Height: 52 mm
- Width: 644 mm
- Depth: 522 mm
- Net weight: 11 kg

Logistic information

- Packaging height: 145 mm
- Packaging width: 770 mm

- Packaging depth: 610 mm
- Gross weight: 12.9 kg
- EAN code: 3838942581083
- Product code: 463149

