


Series 6, Domino induction hob, 30 cm, surface mount with frame PIB375FB5I

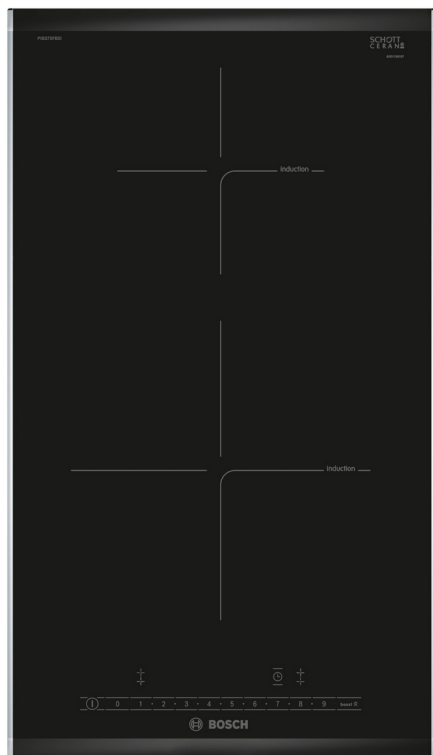

The induction hob: cook fast, clean and safely while using very little energy.

- **Induction Technology:** saves in average 20% energy compared to radiant technology.
- **Comfort Profile:** elegant, appealing design with bevelled front and metal strips on the side.
- **Power Boost:** up to 35% faster heating compared to highest power level.
- **Timer with switch-off function:** turns off the assigned cooking zone after the set time.
- **Child Lock:** locks the control panel to prevent unauthorized use.

Product name/family: Vario/Domino cooking zone cera
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Total number of positions that can be used at the same time: 2
 Required niche size for installation (HxWxD): 51 x 270 x 490-500 mm
 Width of the appliance: 306 mm
 Dimensions: 51x306x527 mm
 Dimensions of the packed product (HxWxD): 126x383x597 mm
 Net weight: 6.2 kg
 Gross weight: 6.9 kg
 Residual heat indicator: Separate
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black, Alu, brushed
 Length electrical supply cord: 110 cm
 Connection rating: 3700 W
 Voltage: 220-240 V
 Frequency: 50 Hz



Series 6, Domino induction hob, 30 cm, surface mount with frame PIB375FB5I

The induction hob: cook fast, clean and safely while using very little energy.

Power and size

- Cooking Zones: 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW)
Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW)
Induction
- 2 Induction cooking zones
- Variable 17-stage power settings for each zone

Design

- Comfort profile (ceramic front facette with stainless steel side trim)
- Domino-MT
- 7-segment display
- Cooking zone power: 3.3kW, 3.6kW with booster
- Can be combined with all hobs in comfort design
- Can be combined with other A01 hobs

Features:

- Switch off timer for every cooking zone
- Count down function
- count-up timer, per cooktop
- Automatic pan recognition
- power management function
- Automatic safety switch off
- Safety lock
- QuickStart Function
- ReStart Function
- 2 stage residual heat indicator for each zone
- Main switch
- PowerBoost function for all zones

Technical Information

- Fixed power cable
- Total Connected load: 3.7 KW
- Min. worktop thickness: 16 mm

Imported and Marketed by


- BSH Household Appliances Manufacturing Pvt.Ltd. 2nd Floor, Arena House, Main Building, Plot No. 103, Road No. 12, MIDC, Andheri East, Mumbai 400093, Maharashtra, India.

Country of Origin



- Spain

Series 6, Domino induction hob, 30 cm, surface mount with frame PIB375FB5I

Measurements in mm

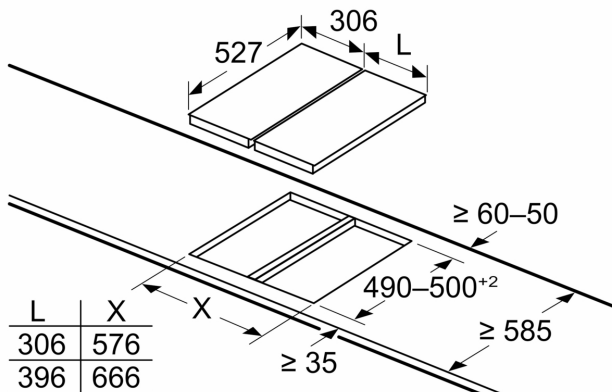


If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

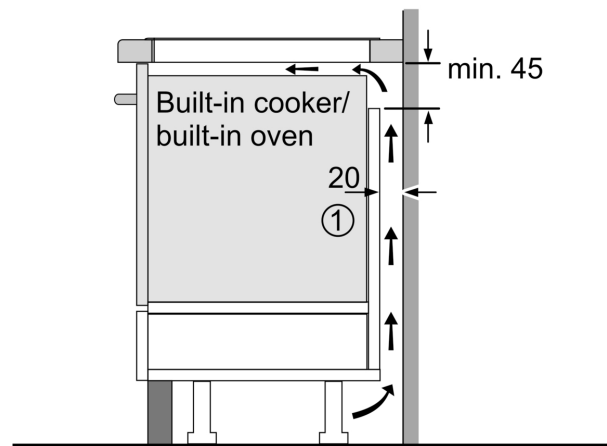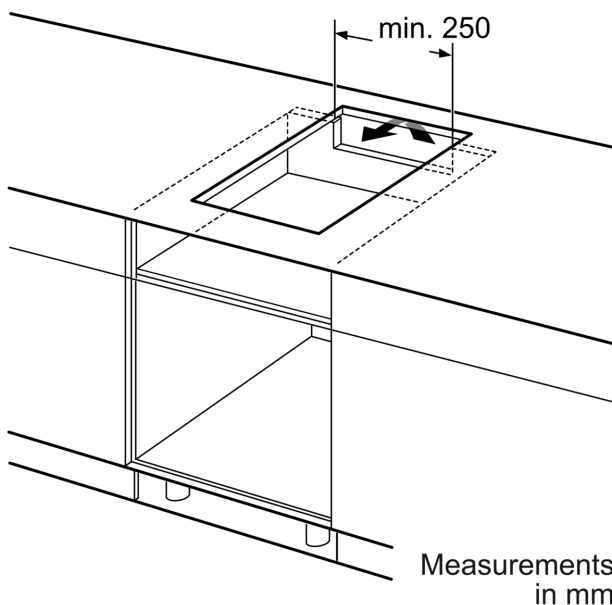

① Ventilation gap must be present


All measurements in mm

measurements in mm



A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth.
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.


The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

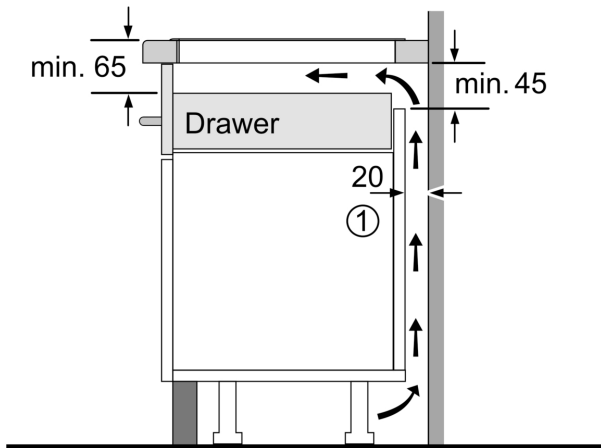

①
Ventilation gap must
be present.

Measurements in mm

measurements in mm
Domino combination options with
corresponding appliance and cut-out
dimensions (see table)




E	F	G
585-600	50	≥ 35
> 600	≥ 50	≥ 50

When installing several elements side by side,
several assembly kits are also required.


Cut-out dimensions (X) depending on
the combination, see table:

Measurements in mm

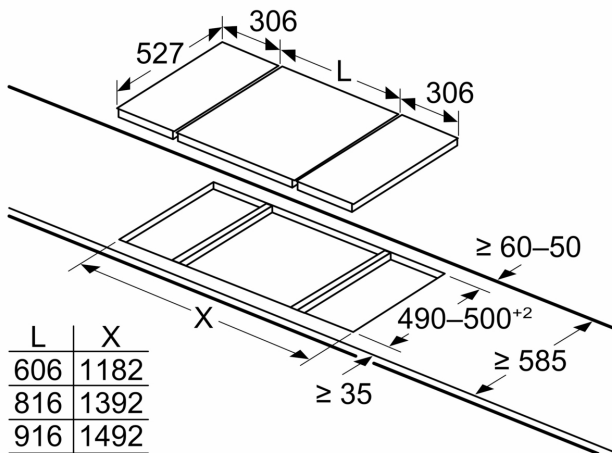


When installing two Domino units right next to
a hob, two assembly kits (HEZ394301) are
required

Measurements in mm

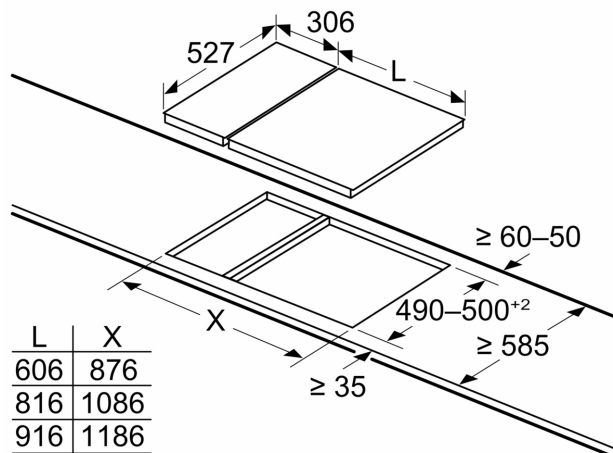


When installing two Domino units right next to
a hob, two assembly kits (HEZ394301) are
required

Measurements in mm

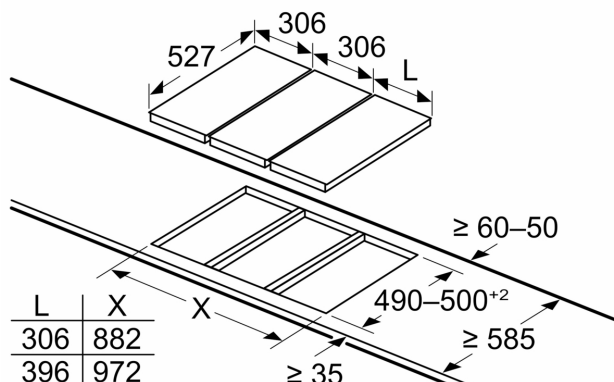

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions



If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)


measurements in mm
Domino combination options with
corresponding appliance and cut-out dimensions

Width category:
Appliance width:

	A	B	C	D	L	X		
2x30	306	306	-	-	-	-	612	576
1x30, 1x40	306	396	-	-	-	-	702	666
1x30, 1x60	306	606	-	-	-	-	912	876
1x30, 1x70*	306	710	-	-	-	-	1016	980
1x30, 1x80	306	816	-	-	-	-	1122	1086
1x30, 1x90	306	916	-	-	-	-	1222	1186
2x40	396	396	-	-	-	-	792	756
1x40, 1x60	396	606	-	-	-	-	1002	966
1x40, 1x70*	396	710	-	-	-	-	1106	1070
1x40, 1x80	396	816	-	-	-	-	1212	1176
1x40, 1x90	396	916	-	-	-	-	1312	1276
3x30	306	306	306	-	-	-	918	882
2x30, 1x40	306	306	396	-	-	-	1008	972
2x30, 1x60	306	306	606	-	-	-	1218	1182
2x30, 1x70*	306	306	710	-	-	-	1322	1286
2x30, 1x80	306	306	816	-	-	-	1428	1392
2x30, 1x90	306	306	916	-	-	-	1528	1492
1x30, 2x40	306	396	396	-	-	-	1098	1062
1x30, 1x40, 1x60	306	396	606	-	-	-	1308	1272
1x30, 1x40, 1x70*	306	396	710	-	-	-	1412	1376
1x30, 1x40, 1x80	306	396	816	-	-	-	1518	1482
1x30, 1x40, 1x90	306	396	916	-	-	-	1618	1582
2x40, 1x60	396	396	606	-	-	-	1398	1362
4x30	306	306	306	306	-	-	1224	1188
3x30, 1x40	306	306	306	396	-	-	1314	1278
1x30, 1x75	306	750	-	-	-	-	1056	1020
1x40, 1x75	396	750	-	-	-	-	1146	1110
2x30, 1x75	306	306	750	-	-	-	1362	1326
1x30, 1x40, 1x75	306	396	750	-	-	-	1452	1416

* Not possible with 70 cm induction hob

Measurements in mm Assembly kit (HEZ394301) for Domino

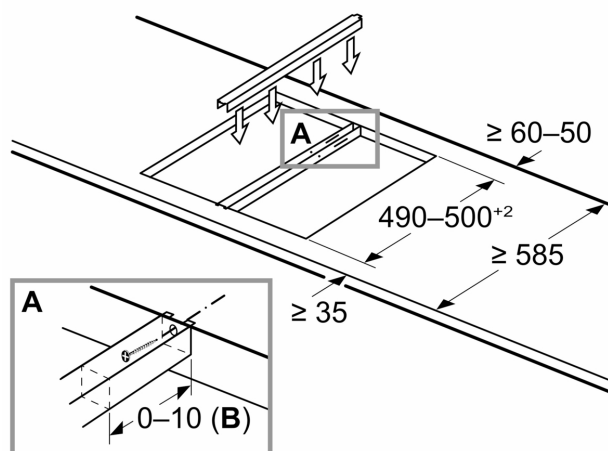

B: Dependent on the cut-out depth