



iQ700, Flex induction cooktop, 30 cm, surface mount with frame EX375FXB5I

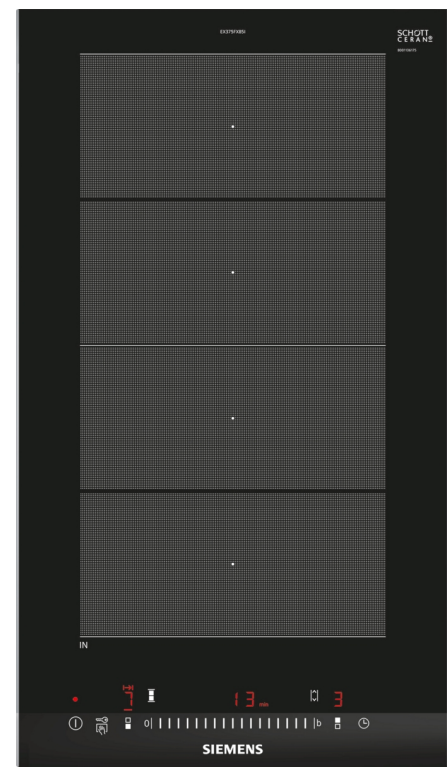

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ The 30 cm wide cooktop is ideal for combining with other Domino or faceted design cooktops.
- ✓ flexInduction – Smart cooking zone that adapts to your cookware.
- ✓ touchSlider - Allows you to control the power level with one touch of your finger.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ powerBoost – Increases the power of an induction zone.

Product name/family: Vario/Domino cooking zone cera
Built-in / Free-standing: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 2
Required niche size for installation (HxWxD): 51 x 270 x 490-500 mm
Width of the appliance: 302 mm
Dimensions: 51x302x520 mm
Dimensions of the packed product (HxWxD):126x383x597 mm
Net weight: 6.1 kg
Gross weight: 6.8 kg
Residual heat indicator: Separate
Location of control panel: Front
Basic surface material: Ceramic
Color of surface: Black, Alu, brushed
Length electrical supply cord: 110 cm
Connection Rating: 3700 W
Voltage:220-240 V
Frequency:50 Hz



HZ390512	Teppan Yaki (large)
HZ390522	Griddle Plate
HZ394301	Connecting strip
HZ9TY010	Teppan Yaki

iQ700, Flex induction cooktop, 30 cm, surface mount with frame EX375FXB5I

Power and size

- 2 induction cooking zones
- Cooking Zones: 1 x Ø 400 mmx210 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Design

- Stainless steel faceted design with front facette and side profiles
- Flex zone
- Can be combined with all hobs in comfort design

Features:

- powerMove Plus
- Timer with switch-off function for all zones
- Count down function
- count-up timer, per cooktop
- Energy efficiency display
- Automatic pan recognition
- power management function
- Automatic safety switch off
- Safety lock
- Wipe protection function
- Two stage residual heat indicators
- Main switch
- ReStart Function
- QuickStart Function
- Boost function for all zones

Technical Information


- connected directly
- Fixed power cable
- Total Connected load: 3.7 KW

Dimensions:



- Installation set to install 2 Dominos side by side
- Installation measurements: 270 mmx490 mm
- Length wire connection: 110 cm
- Min. worktop thickness: 16 mm

**iQ700, Flex induction cooktop, 30
cm, surface mount with frame
EX375FXB5I**

Measurements in mm

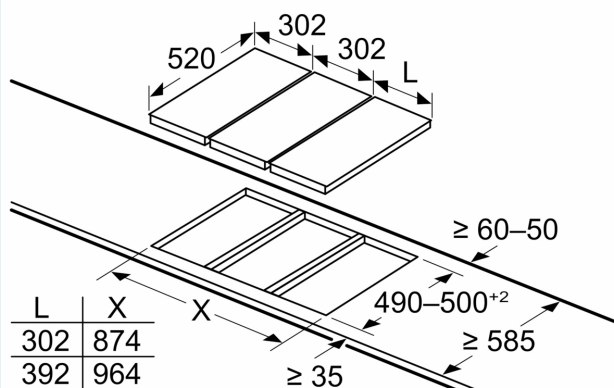


If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

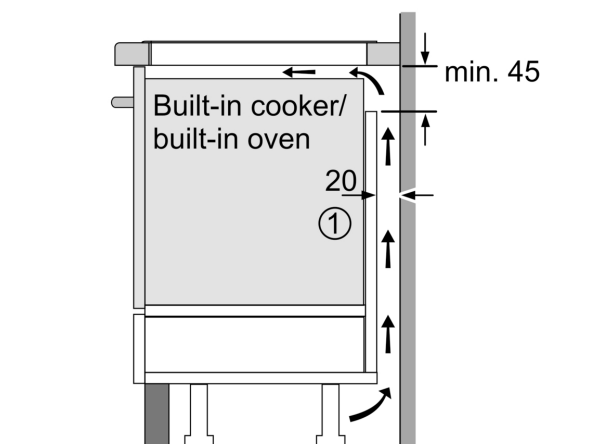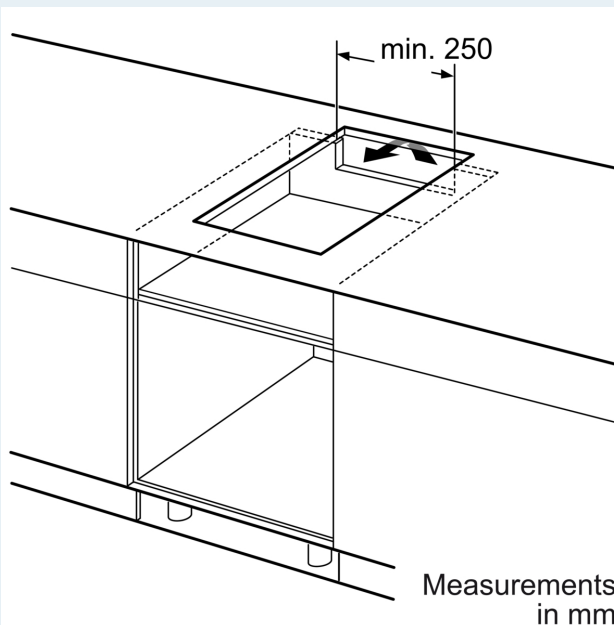

① Ventilation gap must be present





All measurements in mm




A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

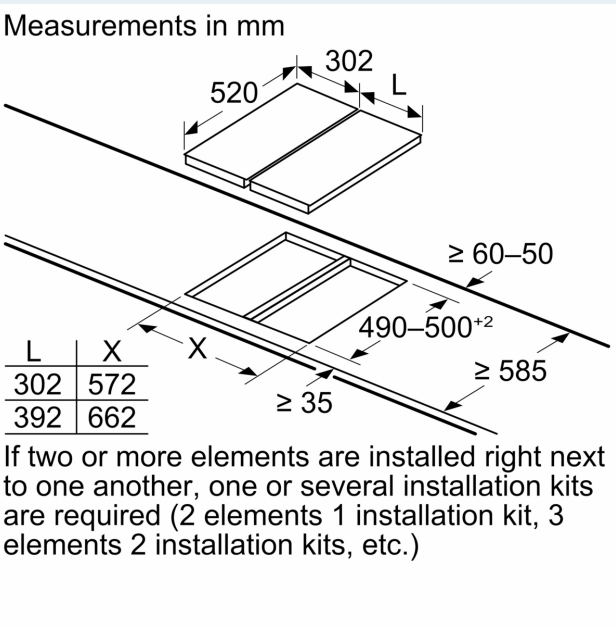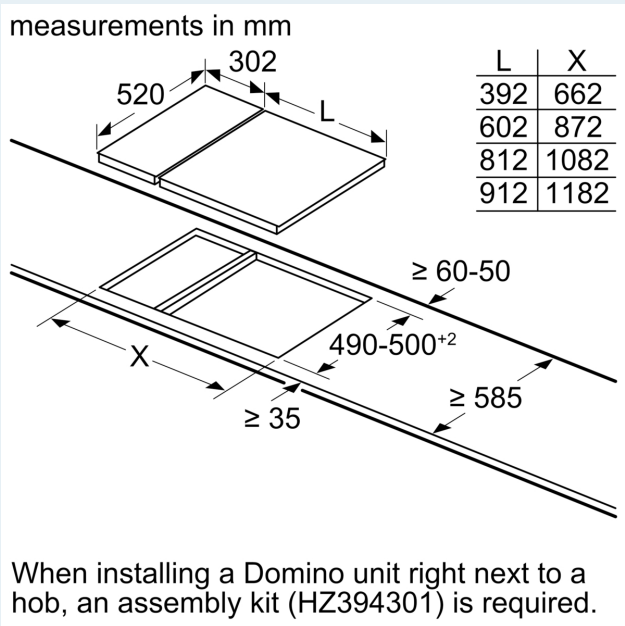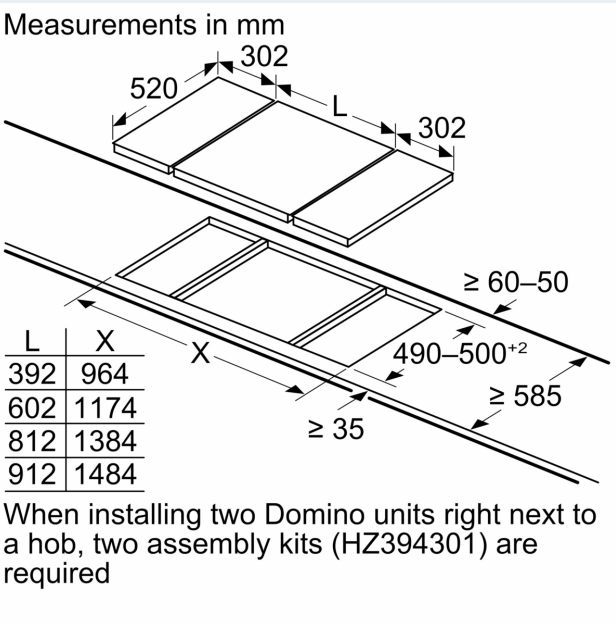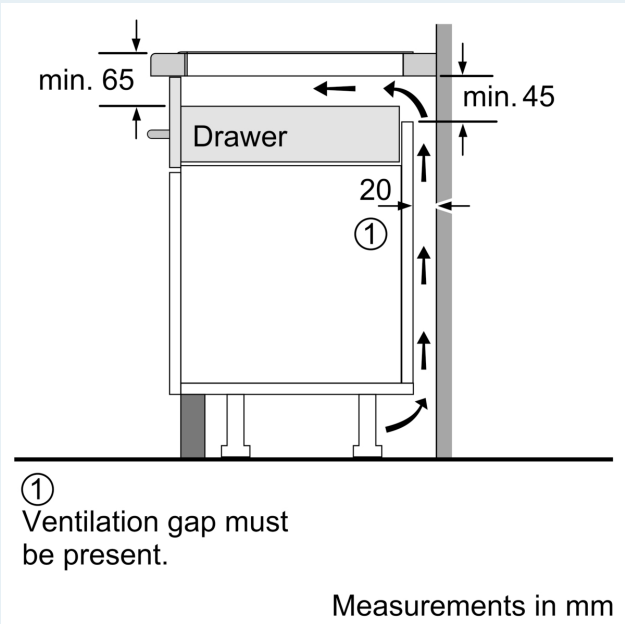


Measurements in mm
Assembly kit (HZ394301) for Domino

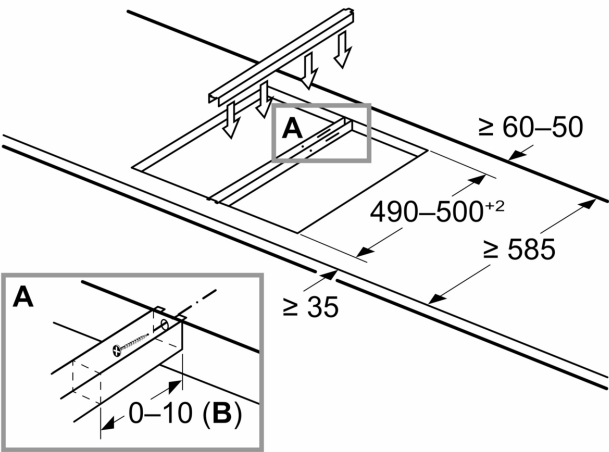

B: Dependent on the cut-out depth


Measurements in mm
Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions



If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)

measurements in mm
Domino combination options with corresponding appliance and cut-out dimensions (see table)



E	F	G
585-600	50	≥ 35
> 600	≥ 50	≥ 50

When installing several elements side by side, several assembly kits are also required.

Cut-out dimensions (X) depending on the combination, see table:

measurements in mm
Domino combination options with corresponding appliance and cut-out dimensions

Width category:	30	40	60	70	80	90
Appliance width:	302	392	602	710	812	912

	A	B	C	D	L	X
2x30	302	302	-	-	604	572
1x30, 1x40	302	392	-	-	694	662
1x30, 1x60	302	602	-	-	904	872
1x30, 1x70*	302	710	-	-	1012	980
1x30, 1x80	302	812	-	-	1114	1082
1x30, 1x90	302	912	-	-	1214	1182
2x40	392	392	-	-	784	752
1x40, 1x60	392	602	-	-	994	962
1x40, 1x70*	392	710	-	-	1102	1070
1x40, 1x80	392	812	-	-	1204	1172
1x40, 1x90	392	912	-	-	1304	1272
3x30	302	302	302	-	906	874
2x30, 1x40	302	302	392	-	996	964
2x30, 1x60	302	302	602	-	1206	1174
2x30, 1x70*	302	302	710	-	1314	1282
2x30, 1x80	302	302	812	-	1416	1384
2x30, 1x90	302	302	912	-	1516	1484
1x30, 2x40	302	392	392	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	1296	1264
1x30, 1x40, 1x70*	302	392	710	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	1606	1574
3x40	392	392	392	-	1176	1144
2x40, 1x60	392	392	602	-	1386	1354
4x30	302	302	302	302	1208	1176
3x30, 1x40	302	302	302	392	1298	1266
2x30, 2x40	302	302	392	392	1388	1356
1x30, 3x40	302	392	392	392	1478	1446
1x30, 1x75	302	750	-	-	1052	1016
1x40, 1x75	392	750	-	-	1142	1106
2x30, 1x75	302	302	750	-	1354	1318
1x30, 1x40, 1x75	302	392	750	-	1444	1408

* Not possible with 70 cm induction hob